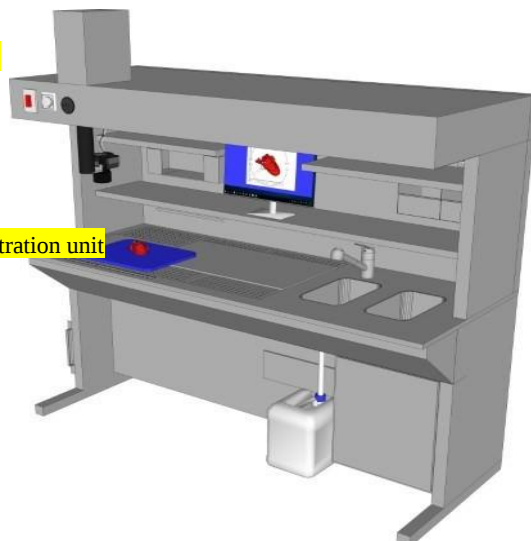


- Workstation for 2 lab technicians 1900x850x1870mm basic
- Completely made of stainless steel AISI304 (316 at request), thickness 1.5 mm
- Downdraft ventilation (optional backdraft) maintaining an airflow velocity of 0.3 m/s
- Air extraction and filtration unit is supplied as a separate
- Perforated desk area, Ø 10 mm holes
- Flexible duct connection between the workstation and the extraction/filtration unit
- 1300m³/h ventilator with 5 stage analogue power regulation
- Vacuum pressure reaches at 2600 Pa to ensure effective air extraction.
- Formalin drain to 10l container
- Optional analogue or touch screen regulation of extraction power
- Mixer faucet for hot/cold water with extendable shower head (1.5 m)
- 300 x 240 x 150 mm sink.
- Work area 950x850 mm
- LED main light
- Equipped with air exhaust system
- Two shelves along the whole station or split for monitor space
- Retractable shelf for small items
- Paper towels holder
- Power socket for accessories 4x
- Emergency cut-off power switch
- Air outlet left/right (optional air TOP)
- Optional 1HP disposal grinder
- Optional water rinse
- Optional Digital image system (Digital image capture system (laptop, laptop holder, telescopic camera with memory, 24MPIX DSLR camera, macro lens, software, USB dongle, secondary camera battery)
- Optoanl air filter
- Optional UV lamp
- Possibility to customize specifications at request
- Power ratings 230V/50Hz, 200W

**878200****PP2 station 190cm**

- 878200W2 PP2 side windows, left+right
- 878200W3 PP2 side windows, left+right+frontal tilted splash shield

778119**Water rinse under perforations**

- 878800 Grinder
- 7700090 Filter slot
- 285 Spare cartridge, high throughput, low filtration 300x300x46mm
- 385 Spare cartridge, high filtration, low throughput 290x290x34mm

222100ZM**Digital image capture system**

- 878950 Germicidal UV lamp, timer clock
- 7703288 Touch screen control
- SF1 Formalin detection meter
- 878900 Formalin dispenser, electronic pump, foot pedal
- 878910 Formalin liquid level sensors (2x), with display
- 878200AT PP2 air TOP outlet
- 878200AB PP2 backdraft+downdraft
- 600233 Magnifier with LED
- BOX2 Safetybox