GOLDBERG[®]58



GOLDBERG® 5S models are high quality surgical tables with built-in multiple functions making them available for general surgery and many specialized surgical procedures—such as urological, gynecologycal, cardiovascular, thoracic/kidney, opthalmic, ENT and neurosurgery.

Dimensions and Weights		
Table top		5 Section
Head Section		236X520 mm.
Back Section*		480X520 mm.
Kidney Part (optional)	<u>-</u>	100X620 mm.
Seat Section	(+/- 5mm)	580X520 mm.
Leg Section**	-/- 2	240X605 mm.
Length of table top	Ξ.	2030 mm.
Table Top Width, w side rails		590 mm.
Table Top Width, w/o side rails		530 mm.
Table Weight		340 kg.
Lifting Capacity Standard (for all positions)400 kg,Max.500 kg.		
Floor leveling and adjustment system 32 mm		

^{*} Back section can be manufactured as two seperate pieces when requested

^{**} Leg section can be manufactured in single piece when requested.

Electrical Characteristics		
Mains Supply	230 VAC 50-60 Hz, Single Phase	
Electrical Protection	I Class Device	
Charge Indicator	On Hand Control Unit	
Dry Battery	It recharges quickly and does not require maintenance	
	Charging voltage 30 V DC	
	Capasity 12 Amp/Hour	
	3060 minutes deponding on use (approx. 200 movement)	

Adjustment Ranges_	
Height (Up/Down)*	550 - 1075 mm.
Head Section (up/down) **	40°/ 90°
Back Section (up/down)	80°/ 40°
Leg Section (up/down), gas spring assisted	40°/ 90°
Leg Section Pivoting Split	90°
Flex/Reflex*	230°/ 120°
Trendelenburd / Reverse Trend.*	30°/ 30°
Lateral Tilt (left/right)*	20°/ 20°
Longitudinal Slide*	300 mm.
Kidney Elevator, optional	120 mm.

^{*} Electrohydraulic drive by hand control/column wall control

^{**} Manual contro


Quality and Standards	
Quality Certificates	ISO 9001, ISO 13485, ISO 14001
Standards	EN 60601-1-2; EN 60601-1; TS EN 60601-2-46
Device Classification	Class I, EC MDD 93/42/EEC 2007/47/EC (Annex IX)

Table Pad		
Standard		
50 mm, Visco-elastic, Waterproof, Antibacterial, Antistatic, Easy Cleaning		
Optional		
70 / 80 mm, Visco-elastic, Waterproof, Antibacterial, Antistatic Easy Cleaning		

General Construction Features	
√ Fixed back and seat sections	Accessory rails of stainless steel on both sides (safety catch opt.)
Detachable leg and head sections	Floor lock and levelling system compansate for uneven floors
√ Top plate of X-ray translucent high pressure compact laminate	Smooth and silent electrohydraulic drive (no sound, no vibration)
$\sqrt{ ext{X-ray}}$ cassette rails along the full length of the surgical area	AISI 304 Stainless Steel base and column panels




Available Positions for Surgical Operations

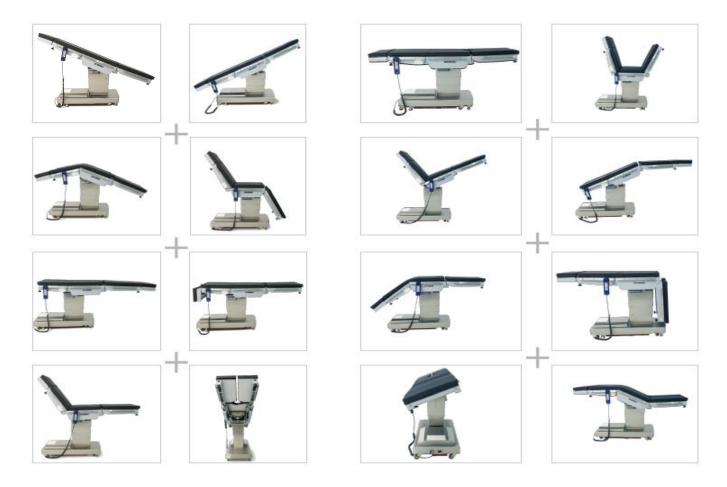

The functional design and easy-to-use hydraulic and electrohydaulic adjustments assure efficient and unobstructed working access for the surgical team. A selection of practical accessories also makes the GOLDBERG® 5S surgical tables available for the most demanding procedures.

EXPLANATION OF THE ICONS OF HAND CONTROL UNIT AND CONTROL UNIT ON COLOUMN

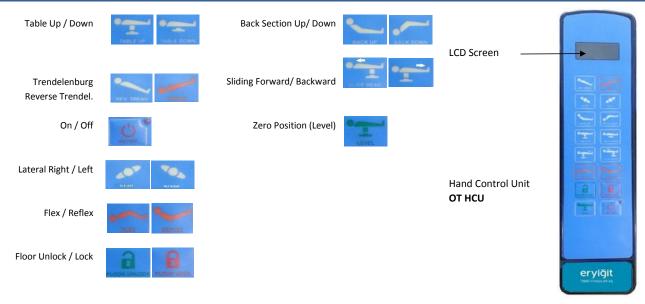

Accessories



Leg/Knee Support (1 Pair) OT KS2



Arm Support (1 Pair) OT AS2



Waste Bowl OT WBX



Shoulder Support (1 Pair) OT SS2



Body Strap OT BST



X-Ray Top OT XRT



Serum Stand OT SSX



Anesthesia Frame OT AFX

Accessories



Lateral Support **OT LTS**



X-ray film cassette holder от хсс



Single Piece Leg Plate OT SPL




Leg Strap OT LBX



OT ARL




Skull Clamp OT SHC



Crossbar Adapter for Skull Clamp OT SCC



Side Rail Clamp OT ARC





Accessory Stand OT ATX



Orthopedic Traction Set ERT 101

For more information, please contact:



IVOGSAN, 1453 Sok. No:3/1 Ostim 06370 Yenimahalle, ANKARA, TURKEY Tel: +90 312 395 5795 (pbx); Fax: +90 312 395 57 96 MEDICAL DEVICES www.eryigit.com.tr; sales@eryigit.com.tr $C \in$

This document is intended for the use of Distributors/Dealers/Customers of ERYIGIT MEDICAL DEVICES Inc. Reproduction in whole or in part by any other party is prohibited.

