



SWITCH-DISCONNECTOR 100A, FRAME SIZE 1, 4-POLE FRONT OPERATING LEFT COMPLETE ASSEMBLY DIRECT OPERATING MECHANISM GREY BOX TERMINAL

Model	
product brand name	SENTRON
product designation	3KD switch disconnector
design of the product	Switch
display version for switch position indicator manual operation	ON-OFF-TEST
design of the actuating element	Long rotary knob
type of the driving mechanism	Front operating mechanism
type of the driving mechanism motor drive	No
General technical data	
number of poles	4
type of device	fixed mounting
size of switch disconnector	1
mechanical service life (operating cycles) typical	15 000
electrical endurance (operating cycles)	
• at AC-23 A at 690 V	6 000
• at DC-23 A at 440 V	1 500
I _{2t} value	
• with closed switch at 1000 V for combination switch +gG/aM SITOR fuse maximum	2 331 A ² ·s
• of the gG fuse at 690 V maximum permissible	75 000 A ² ·s
• of the gG/aM SITOR fuse at 1000 V maximum permissible	6 000 A ² ·s
• of the molded case circuit breaker at 415 V maximum permissible	480 000 A ² ·s
position of the switch operating mechanism	at the left end
overvoltage in percent relative to the operating voltage at AC at 400, 500, 690 V at 50/60 Hz	10 %
overvoltage category	III
degree of pollution	3
Voltage	
operating voltage with current paths in series	
• with degree of pollution 2 at DC rated value	440 V / 3
• with degree of pollution 3 at DC rated value	440 V / 3
insulation voltage	
• rated value	1 000 V
surge voltage resistance rated value	8 kV
operational current at AC-22 A at 1000 V maximum	80 A
let-through current of the fuse at 500 V maximum permissible	12 500 A
let-through current of the gG fuse at 690 V maximum	14 700 A

permissible	
Supply voltage	
operating voltage at AC rated value	1 000 V
Protection class	
protection class IP	IP20
protection class IP	
• with closed switch with cover or cable lug cover	IP20
• on the front	IP20
Dissipation	
power loss [W]	
• with conventional rated thermal current per pole	2.5 W
• with conventional rated thermal current per device	10 W
• for rated value of the current at AC in hot operating state per pole	2.5 W
Main circuit	
operating power	
• at AC-23 A at 500 V rated value	55 kW
operational current rated value	100 A
Auxiliary circuit	
number of connected NC contacts for auxiliary contacts	0
number of connected NO contacts for auxiliary contacts	0
number of connected CO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	4
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
Suitability	
suitability for use main switch	Yes
suitability for use switch disconnector	Yes
suitability for use EMERGENCY OFF switch	No
suitability for use safety switch	Yes
suitability for use according to IEC 62626-1 safety switch	No
suitability for use maintenance/repair switch	Yes
Product details	
product feature interlock	Yes
product component	
• trip indicator	No
• voltage trigger	No
• undervoltage release	No
• undervoltage release with leading contact	No
product extension auxiliary switch	Yes
product extension optional motor drive	No
product extension optional voltage trigger	No
Short circuit	
short-time withstand current (Icw) at 1000 V AC/440 V DC limited to 1 s rated value	3 kA
short-circuit current making capacity (Icm) for switch disconnector	
• at 1000 V AC without fuse link rated value minimum	7 kA
• at DC 440 V without fuse link rated value minimum	7 kA
conditional short-circuit current with line-side fuse protection	
• at 415 V by molded case circuit breaker rated value	36 kA
• at 500 V by gG fuse rated value	100 kA
• at 690 V by gG fuse rated value	100 kA
Connections	
type of connectable conductor cross-sections with flexible busbar	2x (0,8x9 mm ²)
type of connectable conductor cross-sections	
• for copper busbar	'1 x (2 x 9 mm ²)
type of connectable conductor cross-sections for copper	

conductor	• solid • finely stranded with core end processing • stranded	1x (1 ... 16 mm ²) 1x (1 ... 35 mm ²) 1x (6 ... 35 mm ²)
type of electrical connection for main current circuit		box terminal
Mechanical Design		
height		119 mm
width		112 mm
depth		87 mm
fastening method		Screw fixing and standard rail mounting 35 mm
fastening method	• 4-hole front mounting • front mounting with central attachment • rail mounting	No No Yes
mounting position		any
Net Weight		985 g
Environmental conditions		
ambient temperature during operation	• minimum • maximum	-25 °C 70 °C
ambient temperature during storage	• minimum • maximum	-50 °C 80 °C
Certificates		
reference code according to IEC 81346-2		Q
Approvals Certificates		
General Product Approval		



[Confirmation](#)



[Miscellaneous](#)

General Product Approval	Test Certificates	Maritime application	other	
	Type Test Certificates/Test Report			Confirmation Miscellaneous

Environment	
Environmental Confirmations	Environmental Confirmations

Further information	
Information on the packaging	https://support.industry.siemens.com/cs/ww/en/view/109813875
Information for data generation and storage	https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Catalogs, Brochures,...)	https://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system)	https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3KD3042-2ME10-0
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)	https://support.industry.siemens.com/cs/ww/en/ps/3KD3042-2ME10-0
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)	https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3KD3042-2ME10-0
CAx-Online-Generator	


<https://www.siemens.com/cax>


Tender specifications

<https://www.siemens.com/specifications>


Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

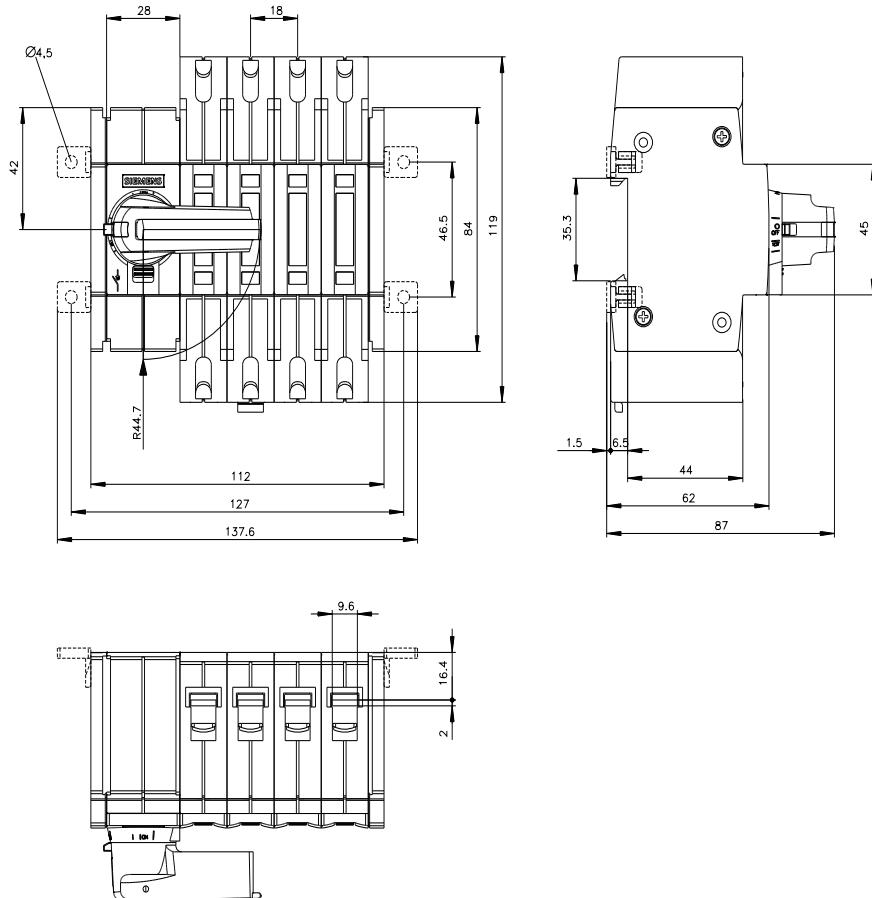

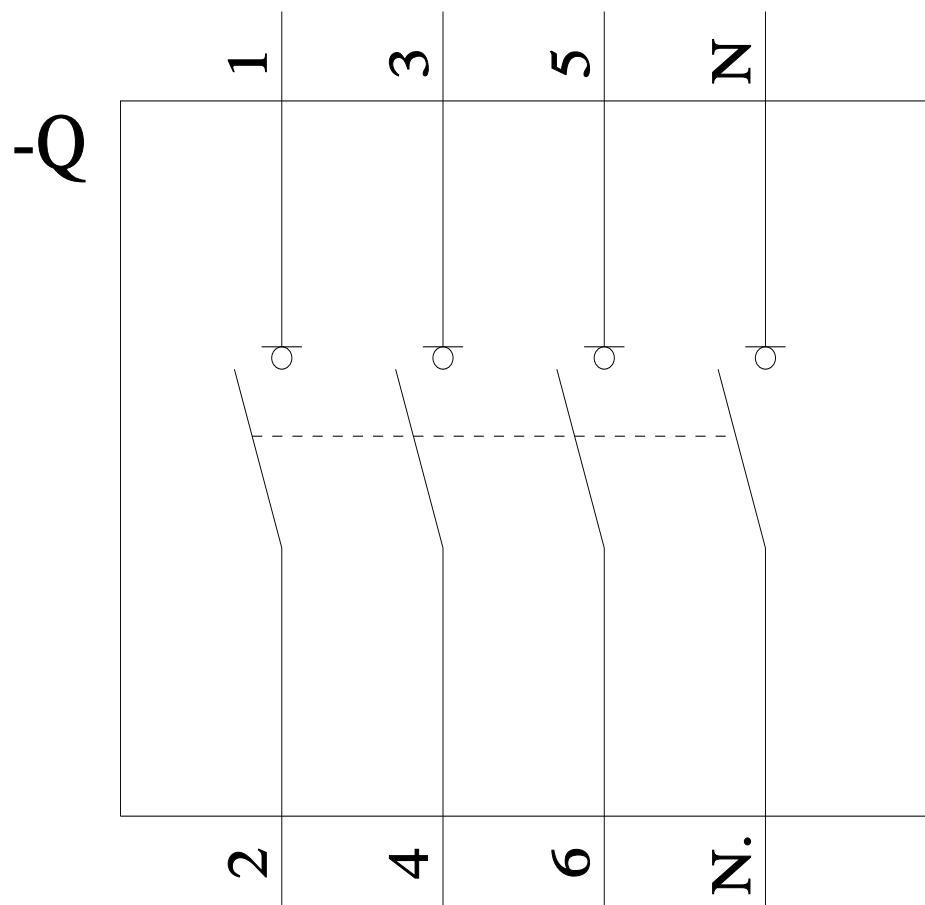

-CR

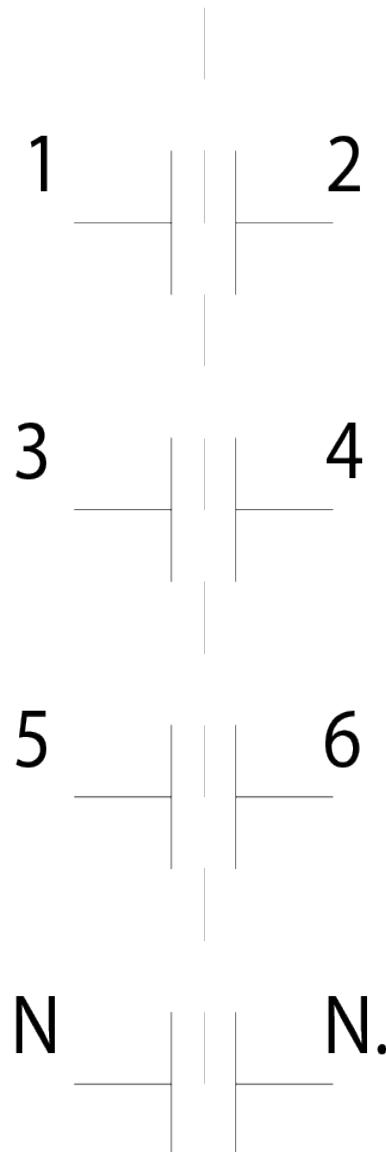

last modified:

7/9/2025

